


SWITCHES | REED SWITCH FOR BIG SLOT

COMPATIBLE WITH LINE 230

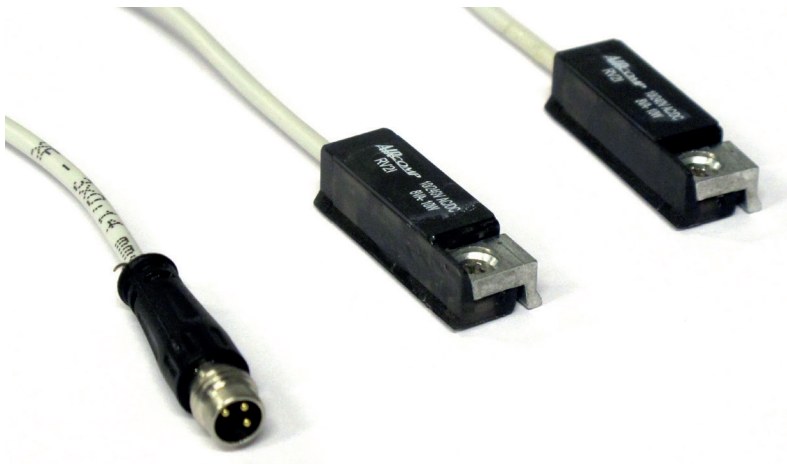

TECHNICAL DATA

Contact type

NO normally open

Fixing type

Directly into slot with locking foot

Operation indicator

Yellow led

Working temperature

-20°C / +85°C

Protection class

IP67


Load

10W - 8 VA


Current

250 mA

Load	2 Wires	3 Wires
	PVC 2x0,14 mm ²	PVC 3x0,14 mm ²

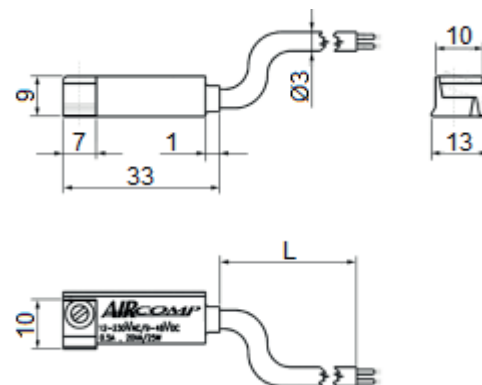

Electrical circuit

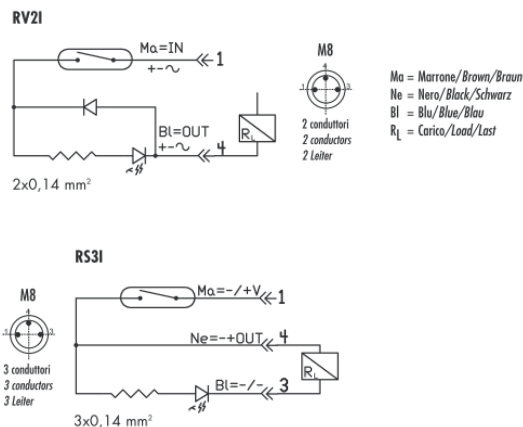

SWITCH

Code	Model	Voltage	Wires	Connection	Cable length	Recommended for
230A000001	RV12I	10 - 240V AC/DC	2 wires	-	2,5m	Lines 230
230A000002	RV12I	10 - 240V AC/DC	2 wires	-	5m	Lines 230
230A000012	RV12I	5 - 50V AC/DC	2 wires	M8 male	0,3m	Lines 230
230A000015	RS3I	5 - 30V DC	3 wires	-	2,5m	Lines 230
230A000016	RS3I	5 - 30V DC	3 wires	-	5m	Lines 230
230A000017	RS3I	5 - 30V DC	3 wires	M8 male	0,3m	Lines 230


M8 EXTENSIONS

Code	Model	Voltage	Wires	Connection	Cable length	Recommended for
230A000009	M8F	60 V AC - 70V DC	3 wires	M8 female	3m	Lines 220, 230, 232, 242, 245
230A000010	M8F	60 V AC - 70V DC	3 wires	M8 female	5m	Lines 220, 230, 232, 242, 245
230A000011	M8F	60 V AC - 70V DC	3 wires	M8 female	10m	Lines 220, 230, 232, 242, 245

M8 EXTENSIONS FOR MOBILE SYSTEMS

Code	Model	Voltage	Wires	Connection	Cable length	Recommended for
230A000018	ZM8F	60 V AC - 70V DC	3 wires	M8 female	3m	Lines 220, 230, 232, 242, 245
230A000019	ZM8F	60 V AC - 70V DC	3 wires	M8 female	5m	Lines 220, 230, 232, 242, 245
230A000021	ZM8F	60 V AC - 70V DC	3 wires	M8 female	10m	Lines 220, 230, 232, 242, 245

SWITCHES | MAGNETIC REED MINI SWITCH

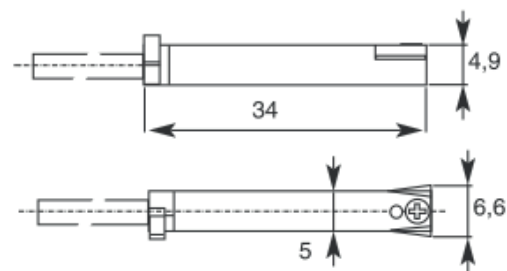

TECHNICAL DATA

Contact type

NO normally open

Fixing type

Directly into slot with locking foot

Operation indicator

Yellow led

Working temperature

-20°C / +85°C

Protection class

IP67

Load

10W - 8 VA


Current

250 mA


Cable	2 Wires	3 Wires
	PVC 2x0,14 mm ²	PVC 3x0,14 mm ²

Electrical circuit

RV2I

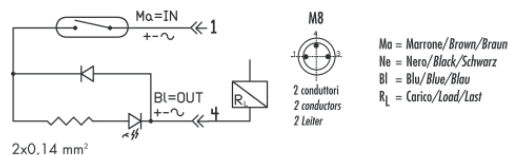

RS3I



SWITCH

Code	Model	Voltage	Wires	Connection	Cable length	Recommended for
230A000003	RV2I	10 - 240V AC/DC	2 wires	-	2,5m	Lines 220, 230, 232, 242, 245
230A000004	RV2I	10 - 240V AC/DC	2 wires	-	5m	Lines 220, 230, 232, 242, 245
230A000005	RV2I	5 - 50V AC/DC	2 wires	M8 male	0,3m	Lines 220, 230, 232, 242, 245
230A000006	RS3I	5 - 30V DC	3 wires	-	2,5m	Lines 220, 230, 232, 242, 245
230A000007	RS3I	5 - 30V DC	3 wires	-	5m	Lines 220, 230, 232, 242, 245
230A000008	RS3I	5 - 30V DC	3 wires	M8 male	0,3m	Lines 220, 230, 232, 242, 245

*all Aircomp switches are equipped with bracket and socket head key.

M8 EXTENSIONS

Code	Model	Voltage	Wires	Connection	Cable length	Recommended for
230A000009	M8F	60 V AC - 70V DC	3 wires	M8 female	3m	Lines 220, 230, 232, 242, 245
230A000010	M8F	60 V AC - 70V DC	3 wires	M8 female	5m	Lines 220, 230, 232, 242, 245
230A000011	M8F	60 V AC - 70V DC	3 wires	M8 female	10m	Lines 220, 230, 232, 242, 245

M8 EXTENSIONS FOR MOBILE SYSTEMS

Code	Model	Voltage	Wires	Connection	Cable length	Recommended for
230A000018	ZM8F	60 V AC - 70V DC	3 wires	M8 female	3m	Lines 220, 230, 232, 242, 245
230A000019	ZM8F	60 V AC - 70V DC	3 wires	M8 female	5m	Lines 220, 230, 232, 242, 245
230A000021	ZM8F	60 V AC - 70V DC	3 wires	M8 female	10m	Lines 220, 230, 232, 242, 245

SWITCHES

ACCESSORIES FOR SWITCHES


MOUNTING BRACKET FOR BIG SLOT



ORDER CODES

Code	Ø	Line
230A032012	All	230


BRACKET FOR REED MINI SWITCH LINE 240-245



ORDER CODES

Code	Ø	L Max	Line
240A032014	32 - 40	11,5	240
240A050031	50 - 63	14,5	240
240A080014	80 - 100	16,5	240
240A125008	125	17,5	240 - 245
240A160008	160 - 200	25	240 - 245

MOUNTING BRACKET FOR LINE 220 - 221 - 222



ORDER CODES

Code	Ø	ØC
220A008010	8	9,4
220A010010	10	11,3
220A012010	12	13,3
220A016010	16	17,3
220A020010	20	21,3
220A025010	25	26,3
222A032005	32	33,5
222A040005	40	41,5
222A050005	50	52
222A063005	63	65