

Autonics MULTI FUNCTION TIMER

AT11DN/AT11EN SERIES

INSTRUCTION MANUAL



Thank you for choosing our Autonics product.

Please read the following safety considerations before use.

■ Safety Considerations

※Please observe all safety considerations for safe and proper product operation to avoid hazards.

※⚠ symbol represents caution due to special circumstances in which hazards may occur.

⚠ Warning Failure to follow these instructions may result in serious injury or death.

⚠ Caution Failure to follow these instructions may result in personal injury or product damage.

⚠ Warning

- Fail-safe device must be installed when using the unit with machinery that may cause serious injury or substantial economic loss.** (e.g. nuclear power control, medical equipment, ships, vehicles, railways, aircraft, combustion apparatus, safety equipment, crime/disaster prevention devices, etc.) Failure to follow this instruction may result in personal injury, economic loss or fire.
- Do not use the unit in the place where flammable/explosive/corrosive gas, humidity, direct sunlight, radiant heat, vibration, impact, or salinity may be present.** Failure to follow this instruction may result in explosion or fire.
- Install on a device panel to use.** Failure to follow this instruction may result in fire or electric shock.
- Do not connect, repair, or inspect the unit while connected to a power source.** Failure to follow this instruction may result in fire or electric shock.
- Check 'Connections' before wiring.** Failure to follow this instruction may result in fire.
- Do not disassemble or modify the unit.** Failure to follow this instruction may result in fire or electric shock.

⚠ Caution


- Use the unit within the rated specifications.** Failure to follow this instruction may result in fire or product damage.
- Use dry cloth to clean the unit, and do not use water or organic solvent.** Failure to follow this instruction may result in fire or electric shock.
- Keep metal chip, dust, and wire residue from flowing into the unit.** Failure to follow this instruction may result in fire or product damage.

■ Ordering Information

AT	11	DN	Power supply
			No mark 100-240VAC 50/60Hz, 24-240VDC
			1 12VDC
			2 24VAC 50/60Hz, 24VDC
		DN	Time limit 2c
		EN	Instantaneous 1c + Time limit 1c
		11	11-pin plug type
		AT	Analog Timer


※11-pin socket (PG-11, PS-11(N)) is sold separately.

■ Unit Description

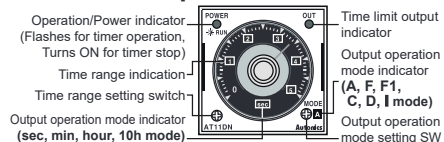


■ Connections

• AT11DN SERIES



※1: AC/DC voltage: 100-240VAC 50/60Hz, 24-240VDC
: 24VAC 50/60Hz, 24VDC
DC voltage: 12VDC


• AT11EN SERIES




※The above specifications are subject to change and some models may be discontinued without notice.

※Be sure to follow cautions written in the instruction manual and the technical descriptions (catalog, homepage).

■ Dimensions

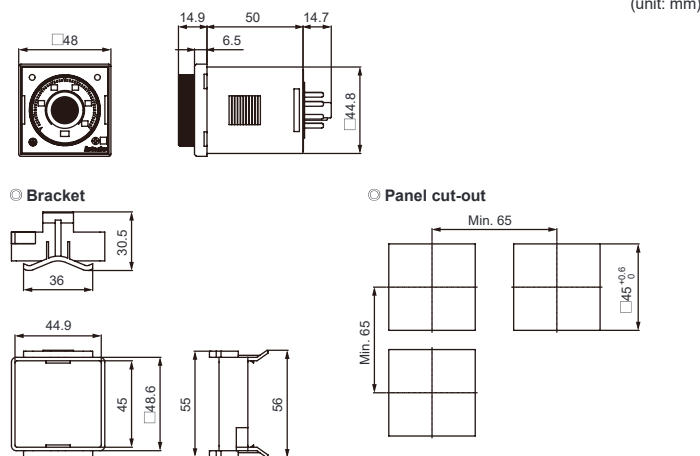

■ Output Operation Mode

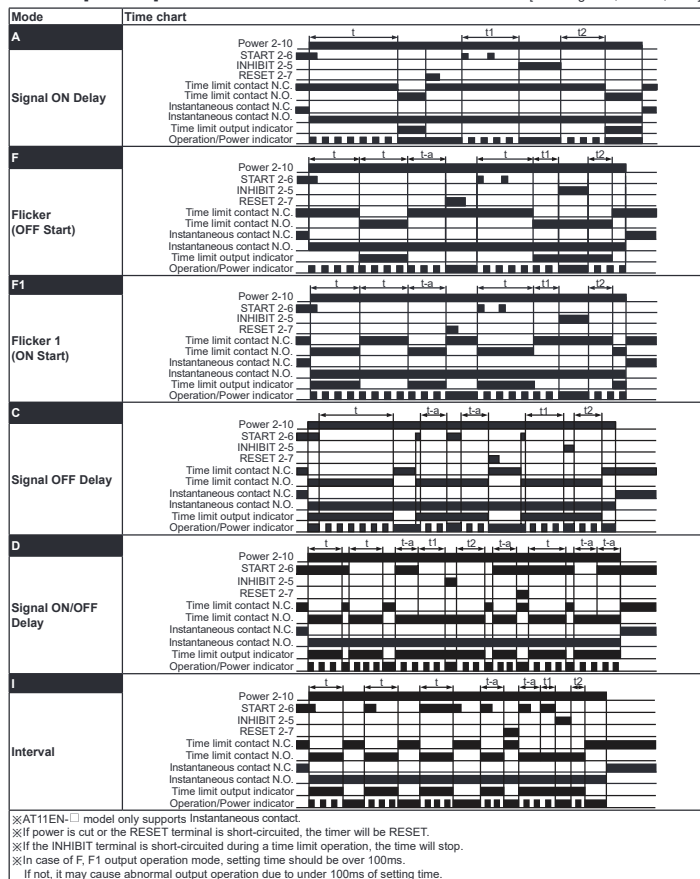

■ Specifications

Model	AT11DN-□ AT11EN-□	
Function	Multi Function Timer	
Control time setting range※1	0.05 sec. to 100 hour	
Power supply	•100-240VAC~ 50/60Hz, 24-240VDC= universal •24VAC~ 50/60Hz, 24VDC= universal •12VDC=	
Allowable voltage range	90 to 110% of the rated voltage	
Power consumption	•Max. 3.5VA (100-240VAC~), Max. 1.5W (24-240VDC=) •Max. 4VA (24VAC~), Max. 1.5W (24VDC=) •Max. 1W (12VDC=)	•Max. 4.3VA (100-240VAC~), Max. 2W (24-240VDC=) •Max. 4.5VA (24VAC~), Max. 2W (24VDC=) •Max. 1.5W (12VDC=)
Return time	Max. 100ms	
Time operation	Signal ON Start	
Min. input signal width	START, RESET, INHIBIT: approx. 50ms	
Input	START, RESET, INHIBIT: [No-voltage input] - Short-circuit impedance: max. 1kΩ, Residual voltage: max. 0.5VDC, Open-circuit impedance: max. 100kΩ	
Control output	Contact type	Time limit DPDT (2c)
	Contact capacity	250VAC~ 5A, 24VDC= 5A resistive load
Relay	Mechanical	Min. 10,000,000 operations
Life cycle	Electrical	Min. 100,000 operations (250VAC 5A resistive load)
Repeat error	Max. ±0.2% ±10ms	
Setting error	Max. ±5% ±50ms	
Voltage error	Max. ±0.5%	
Temperature error	Max. ±2%	
Insulation resistance	100MΩ (at 500VDC megger)	
Dielectric strength	2,000VAC 50/60Hz for 1 minute	
Environment	Ambient temp.	-10 to 55°C, storage: -25 to 65°C
	Ambient humid.	35 to 85%RH, storage: 35 to 85%RH
Approval	CE, RoHS	
Accessory	Bracket	
Weight※2	Approx. 132.2g (approx. 85g)	Approx. 134.7g (approx. 87.5g)


※1: Refer to time specifications for control time setting range by model.

※2: The weight includes packaging. The weight in parenthesis is for unit only.


※Environment resistance is rated at no freezing or condensation.

■ Cautions during Use

- Follow instructions in 'Cautions during Use'. Otherwise, it may cause unexpected accidents.
- 12VDC, 24VDC, 24VAC power supply should be insulated and limited voltage/current or Class 2, SELV power supply device.
- When supplying or turning off the power, use a switch or etc. to avoid chattering.
- Install a power switch or circuit breaker in the easily accessible place for supplying or disconnecting the power.
- In order to block peripheral current, use isolation transformer which of secondary part is not grounded as (Figure 1) to supply power to the external input device.

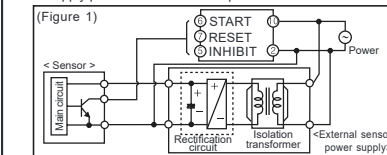

- In order to avoid leakage current flowing, connect resistance and condenser as (Figure 3). If connect as (Figure 2), it may cause malfunction due to leakage current.



- Do not connect two or more timers with only one input contact or transistor simultaneously.
- Keep away from high voltage lines or power lines to prevent inductive noise. In case installing power line and input signal line closely, use line filter or varistor at power line and shielded wire at input signal line. Do not use near the equipment which generates strong magnetic force or high frequency noise.
- Change setting time, time range, operation mode or etc. after turning off the power of the timer.
- This unit may be used in the following environments.
 - ①Indoors (in the environment condition rated in 'Specifications')
 - ②Altitude max. 2,000m
 - ③Pollution degree 2
 - ④Installation category II