
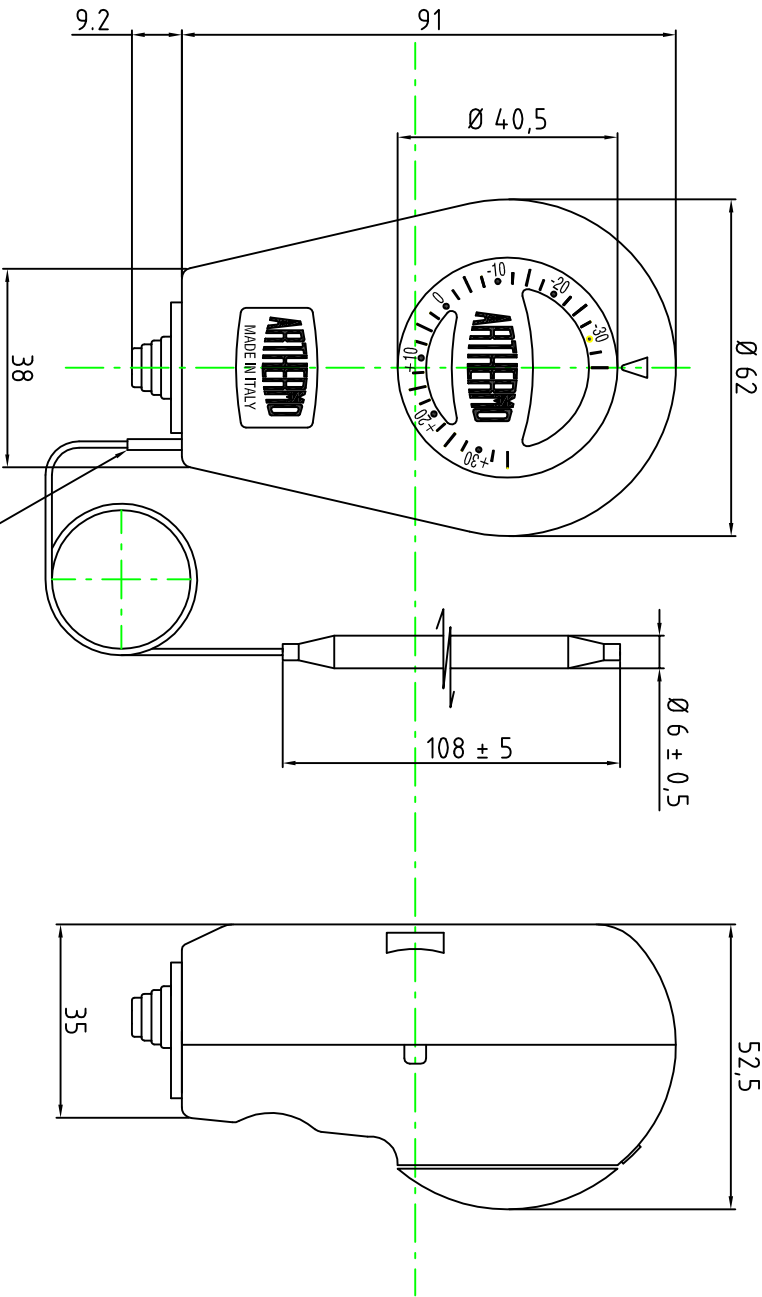


SCHEMA ELETTRICO / ELECTRIC DIAGRAM
S.P.D.T.

ETICHETTA INDELEBILE PER RIFERIMENTO UNICO



DATI TECNICI - TECHNICAL DATA

SCALA RANGE:	-35+35°C
DIFFERENZIALE / DIFFERENTIAL :	3 ± 2°C
TOLL.VALORI F.S.	± 3°C
CAPILLARE / CAPILLARY :	MM 1500 ACCIAIO INOX / INOX STEEL
INVOLUCRO MANOPOLA / CASE:	LIGHT BLUE PANTONE 2995C
SERIGRAFIA / DIAL :	RED KNOB - WHITE NUMBERS
PORTATA CONTATTI / BREAKING CAPACITY :	C1 15(2,5)A 400VAC / C2 2,5(0,4)A 400 VAC
MINIMUM CORRENT.:	200 mA
INSULATION RESISTANCE :	>100 M ohm
TEST DI VITA / LIFE OF PRODUCT :	100.000 CICLI / CYCLES
MAX °C SOPP. CORPO / MAX °C CASE	80 °C
GRADO TENUTA / IP GRADE :	IP 4,0

MODIFICA	DOC.RIF.	DATA	APPARECCHIO ASSIEME	ARTERHO	DISIGNATO A. SALA	APPROVATO SALA A.
1			PARTICOLARE	ARTH093	SCALA	DATA
2			MATERIALE		1 : 1	10/05/2016
3			TRATTAMENTO			
4			NOTE			
5						