

### SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE). WITH INTEGRATED BY-PASS CONTACTOR, 245A



|                           |                      |  |     | *                              |
|---------------------------|----------------------|--|-----|--------------------------------|
| Product designation       |                      |  |     | Soft Starter                   |
| Product type designati    | on                   |  |     | ADXB                           |
| Motor type                |                      |  |     | Asynchronous                   |
|                           |                      |  |     | three phase                    |
| Electrical features       |                      |  |     |                                |
| Supplies voltage          |                      | Turn a of avertors                     |     | Thuas mhass                    |
|                           |                      | Type of system<br>Rated supply voltage | V   | Three phase 208500VAC          |
|                           |                      | auxiliary supply voltage (Us)          | V   | 208240VAC                      |
|                           |                      | Rated frequency                        | Hz  | 50/60                          |
| Rated starter current le  | 2                    | Nated frequency                        | A   | 245                            |
| Rated motor power         | ,                    |  |     | 240                            |
| rated motor power         | IEC ratings (T≤40°C) |  |     |                                |
|                           | 0 .ago (o o)         | 230VAC                                 | kW  | 75                             |
|                           |                      | 400VAC                                 | kW  | 132                            |
|                           |                      | 500VAC                                 | KW  | 160                            |
|                           | UL ratings (T≤40°C)  |  |     |                                |
|                           | <b>5</b> ( ,         | 220-240VAC                             | HP  | 75                             |
|                           |                      | 380-415VAC                             | HP  | 150                            |
|                           |                      | 440-480VAC                             | HP  | 200                            |
| Number of controlled p    | phases               |  | Nr. | 3                              |
| Built-in bypass           |                      |  |     | Yes                            |
| Cooling System            |                      |  |     | Forced                         |
| Programming interface     |                      |  |     |                                |
| Display                   |                      |  |     | Backlit LCD 2x16 character     |
| Programming with NFO      | C technology         |  |     | No                             |
| Optical port              |                      |  |     | No                             |
| Startup and stop settin   | gs                   |  |     |                                |
|                           |                      |  |     | Torque or voltage              |
| Startup method            |                      |  |     | ramp with current limitation   |
|                           |                      |  |     | Torque ramp,                   |
| Stop method               |                      |  |     | voltage ramp,                  |
|                           |                      |  |     | free-wheel stop                |
| Braking method            |                      |  |     | DC dynamic with external relay |
| Protections               |                      |  |     |                                |
| Auxiliary supply protec   | tion                 |  |     | Voltage too low                |
|                           |                      |  |     | No power, phase                |
|                           |                      |  |     | loss, phase sequence,          |
| Power supply Protection   | on                   |  |     | frequency out of               |
| . Site: Cappiy i followin |                      |  |     | limits, minimum                |
|                           |                      |  |     | and maximum                    |
|                           |                      |  |     | voltage                        |





## SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE). WITH INTEGRATED BY-PASS CONTACTOR, 245A

| Motor protection                             | Overload at starting (trip clas 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run), |
|--|--|
| Starter protection                           | Overcurrent, overtemperature bypass failure, phase shorted, temperature sensor fault, maintenance request  |
| Functions                                    |  |
| Built-in bypass                              | 3  |
| Built-in display and keypad                  | Yes  |
| Languages                                    | Yes  |
| View measurements                            | 4  |
| Torque control                               | Yes  |
| Adjustable current limit                     | Yes  |
| Dynamic braking                              | Yes  |
| Kick Start function                          | Yes  |
| Motor overload electronic protection         | Yes  |
| Motor protection PTC input                   | Yes  |
| Protection against phase loss                | Yes  |
| Protection against phase inversion           | Yes  |
| Protection against locked rotor              | Yes  |
| Protection against thyristor overtemperature | Yes  |
| Protection against low load                  | Yes  |
| Programmable alarm                           | Yes  |
| Digital inputs                               | Yes  |
| Analog inputs                                | Yes  |
| Digital outputs                              | Yes  |
| Analog output                                | Yes  |
| Monitoring communication                     | Yes  |
| Optical port for programming                 | RS323  |
| Event log                                    | No   |
| Motor hour counter                           | Yes  |
| Startup counter                              | Yes  |
| Clock calendar                               | Yes  |
| Remote external keypad                       | Yes  |
| Plug-in version                              | Optional   |
| Input and Output                             |  |
| Digital inputs                               |  |
|  | 3 (2 digital inputs  Number of digital input  Nr. + 1 digital/analog   |

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

input)





#### SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE). WITH INTEGRATED BY-PASS CONTACTOR, 245A

| Analog inputs   | Digital input type  Digital input functions | 24VDC (no need for external feeder) 1 input for start, 1 input programmable (stop, free-wheel stopping, external alarm, motor preheat, local control, alarms inhibit, manual resetting of motor thermal protection, keypad lock, second moto |
|-----------------|---|--|
| Analog inputs   | Number of analog input                      | Nr. 1 (digital/analog)<br>0-10VDC (0-  |
|                 | Analog input type                           | 20mA with external resistor 500Ω)  |
| Divited autouts | Analog input functions                      | Motor protection via PTC probes, acceleration and/or deceleration ramp via analog input, analog input thresholds for motor starting and stopping, analog input thresholds for programmable relay enable                                      |
| Digital outputs | Number of digital output                    | Nr. 4  |
|                 | Digital output arrangement                  | 3 x 1 NO (SPST)<br>+ 1 C/O (SPDT)<br>Ratings: 5A<br>250VAC AC1, 2A<br>250VAC AC15  |
| Analog outputs  | Digital output functions                    | C/O output for global alarm, 3 x 1NO outputs programmable (OFF, motor powered, up to speed, braking, current limit, service required, cascade starting, programmable input thresholds, alarm Axx)  |

51ADX0245B





51ADX0245B


# SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE). WITH INTEGRATED BY-PASS CONTACTOR, 245A

|                         |                       | Number of analog output | Nr. | 1<br>020mA,  |
|-------------------------|-----------------------|-------------------------|-----|--|
|                         |                       | Analog output type      |     | 420mA (010V with external resistor 500Ω) Current, torque,              |
|                         |                       | Analog output functions |     | motor thermal<br>status, power<br>factor and active<br>power           |
| Ambient conditions      |                       |                         |     |  |
| Temperature             |                       |                         |     |  |
|                         | Operating temperature |                         |     |  |
|                         |                       | min                     | °C  | -10<br>+55°C (with   |
|                         |                       | max                     | °C  | current derating<br>>45°C of 1.5%/<br>°C)                              |
|                         | Storage temperature   |                         |     |  |
|                         |                       | min                     | °C  | -30  |
|                         |                       | max                     | °C  | +70  |
| Max altitude            |                       |                         | m   | 1000 without derating (over 1000mt with current derating of 0.5%/100m) |
| Relative humidity       |                       |                         | %   | 95% without condensation or dripping                                   |
| Pollution degree        |                       |                         |     | 3  |
| Housing                 |                       |                         |     |  |
| Mounting                |                       |                         |     | Screw-fixing   |
| IP degree of protection |                       |                         |     | IP00   |
| Dimensions (W x H x D   | )                     |                         | mm  | 273 x 680 x 310  |
| Weight                  |                       |                         | Kg  | 39.3   |
| Dimensions [mm (in)]    |                       |                         |     |  |





SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE). WITH INTEGRATED BY-PASS CONTACTOR, 245A

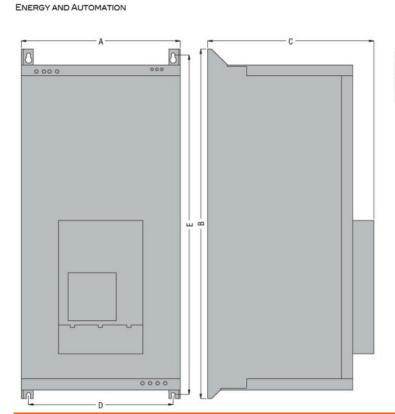

| TYPE      | A            | В            | С            | D           | E            |
|-----------|--------------|--------------|--------------|-------------|--------------|
| ADX 0142B | 273 (10.75") | 600 (23.62") | 285 (11.22") | 230 (9.05") | 560 (25.20") |
| ADX 0190B | 273 (10.75") | 680 (26.77") | 310 (12.20") | 230 (9.05") | 640 (25.20") |
| ADX 0245B | 273 (10.75") | 680 (26.77") | 310 (12.20") | 230 (9.05") | 640 (25.20") |

### Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-4-2

Certificates

EAC

ETIM classification

ETIM 8.0 EC000640 - Soft starter