


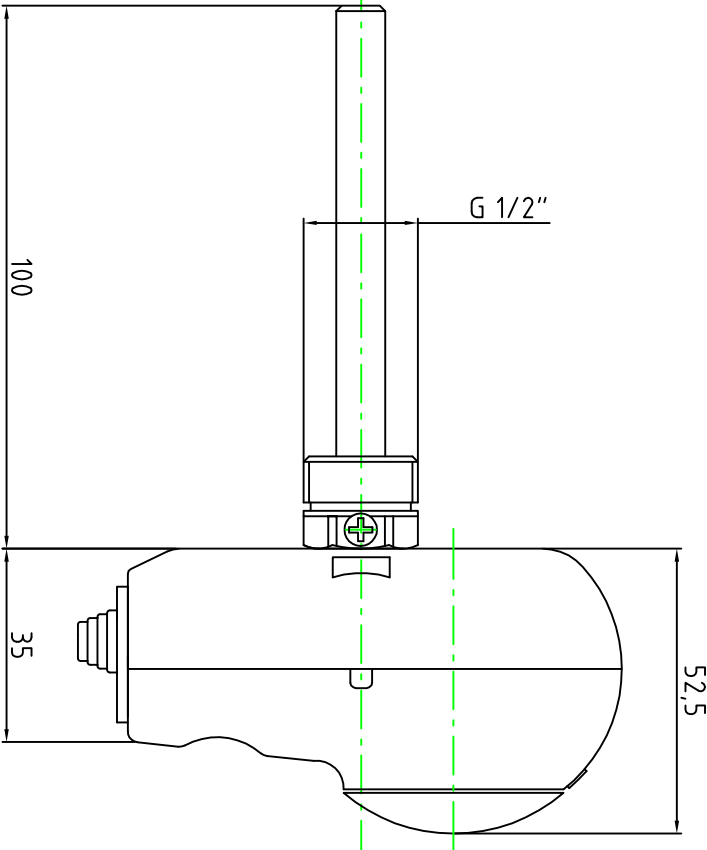


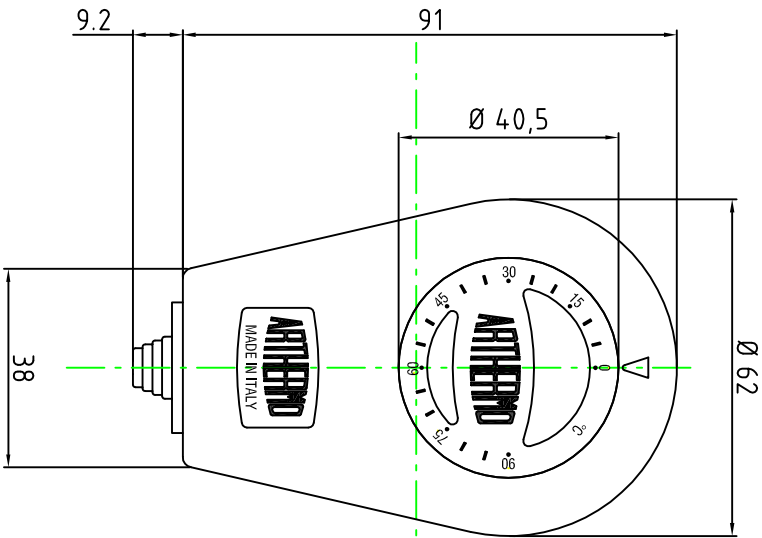

ETICHETTA INDELEBILE PER RIFERIMENTO UNICO



SCHEMA ELETTRICO / ELECTRIC DIAGRAM S.P.D.T.



DATI TECNICI - THECNICAL DATA

SCALA RANGE:	0/90°C
DIFFERENZIALE / DIFFERENTIAL:	4 $\pm$ 2.5°C
TOLL. VALORI F.S.	$\pm$ 3°C
CAPILLARE / CAPILLARY:	POZZETTO G 1/2" / POCKET G 1/2"
INVOLUCRO MANOPOLA / CASE:	LIGHT BLUE PANTONE 2995C
SERIGRAFIA / DIAL:	RED KNOB - WHITE NUMBERS
PORTATA CONTATTI / BREAKING CAPACITY:	C1 15(2.5)A 400 VAC - C2 2.5(0.4)A 400 VAC
MINIMUM CORRENT.:	200 mA
INSULATION RESISTANCE:	> 100 M ohm
TEST DI VITA / LIFE OF PRODUCT:	100.000 CICLI / CYCLES
MAX °C SOPP. CORPO / MAX °C CASE	80°C
GRADO TENUTA / IP GRADE:	IP 40

MODIFICA		DOC RIF.	DATA	APPARECCHIO ASSIEME	
1				PARTICOLARE	ARTH100
2				MATERIALE	
3				TRATTAMENTO	
4					
5				NOTE	

DISIGNATO A. SALA	APPROVATO SALA A.
SCALA 1 : 1	DATA 11/11/2011
CODICE ARTH100	