

Please read this document carefully before using this product. The guarantee will be invalidated if the device is damaged by not following instructions detailed in the manual. The company shall not be responsible for any damage or losses however caused, which may be experienced as a result of the installation or use of this product.

ENDA ET1411 DIGITAL THERMOSTAT

Thank you for choosing ENDA ET1411 temperature controller.

- * 35 x 77mm sized.
- * On-Off control.
- * Single contact output for selectable heating or cooling control.
- * Single NTC probe input.
- * Offset value can be entered for NTC probe.
- * In the case of probe failure, output state can be selected on, off or periodical running.
- * Upper and lower limits of the setpoint can be adjusted.
- * Temperature unit can be selected °C or °F.
- * CE marked according to European Norms.

Order Code: ET1411-NTC-

Supply Voltage 230VAC......230V AC 24.....24V AC/DC 12.....12V AC/DC


Connection Diagram



ENDA ET1411 is intended for installation in control panels. Make sure that the device is used only for intended purpose. The electrical connections must be carried out by a qualified staff and must be according to the relevant locally applicable regulations. During an installation, all of the cables that are connected to the device must be free of electrical power. The device must be protected against inadmissible humidity, vibrations, severe soiling and make sure that the operation temperature is not exceeded. The cables should not be close to the power cables or components.

ENDA INDUSTRIAL ELECTRONICS SN: XXXXXXXXX E11411-NTC-230VAC C DIGITAL THERMOSTAT Made in Turkey	ENDA INDUSTRIAL ELECTRONICS SN: XXXXXXXXXX ET1411-NTC-12 IIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII	ENDA INDUSTRIAL ELECTRONICS SN: XXXXXXXXX ET1411-NTC-24 DIGITAL THERMOSTAT Made in Turkey
⁴⁰ 54 54 54 54 54 54 54 54 54 54 12	81 680407 1 705443	
Stepher 304		ACCC 210% SENSOR
		1 2 3 4 5 6 7 8 9 10 11 12

Equipment is protected throughout by DOUBLE INSULATION





Holding screw

0.4-0.5Nm



Technical Specifications

ENVIRONMENTAL CONDITIONS			
Ambient/storage temperature	0 +50°C/-25 70°C (with no icing)		
Max. relative humidity	80%, up to 31°C decreasing linearly 50% at 40°C		
Rated pollution degree	According to EN 60529	Front panel : IP65	
		Rear panel : IP20	
Height	Max. 2000m		
Do not use the device in locations subject to corrosive and flammable gasses.			

ELECTRICAL CHARACTERISTICS		
Supply voltage	230V AC +10% -20%, 50/60Hz or 12/24V AC/DC ±10%, 50/60Hz.	
Power consumption	Max. 3VA	
Wiring	2.5mm ² screw-terminal connections.	
Scale	-60.0 +150.0°C (-76.0 +302.0°F)	
Sensitivity/Accuracy	0.1°C / ±1°C	
Time Accuracy	(±1%-1sec)	
Indicator	4 digits, 12.5mm, 7 segment yellow LED	
EMC	EN 61326-1: 1997, A1: 1998, A2: 2001 (Performance criterion B is satisfied for EMC tests.	
	The device is designed to operate in controlled electromagnetic environment)	
Safety requirements	EN 61010-1: 2001 (Pollution degree 2, overvoltage category II)	


OUTPUT OUTPUT Relay: 250V AC, 8A (for resistive load), NO+NC; 1/2 HP 240V AC $\cos \Phi = 0.4$ (for inductive load) Life expectancy for relay Mechanical 30.000.000: Electrical 100.000 operation.

CONTROL	
Control type	Single-setpoint control
Control algorithm	On-Off control
Hysteresis	Adjustable between 0.1 20.0°C.

HOUSING

HOUSING	
Housing type	Suitable for flush-panel mounting.
Dimensions	W77xH35xD71mm
Weight	Approx. 205g (After packing)
Enclosure material	Self extinguishing plastics
•	

While cleaning the device, solvents (thinner, benzine, acid etc.) or corrosive materials must not be used.

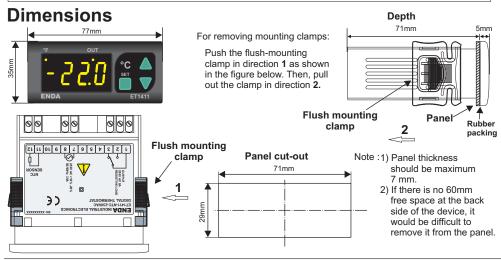

url : www.enda.com.tr

FAHRENHEIT



OUT

LED

Displayed process value in the run mode, parameter name or value in programming mode.

Used for selecting menu and increasing setpoint value of the parameters in the programming mode and for increasing the setpoint value in the run mode. When held down for a few seconds, the change rate accelerates.

_Used for selecting parameters and decreasing the setpoint value in the programming mode and for decreasing the setpoint value in the run mode. When held down for a few seconds, the change rate accelerates.

Used for adjusting the value of the setpoint in the run mode and for adjusting the selected parameter in the programming mode. While holding 📕 key, setpoint value of the selected parameter appears and by using 🔺 and 💙 keys the value can be adjusted.

