SIEMENS

Data sheet 3RW3046-1BB14



SIRIUS soft starter S3 80 A, 45 kW/400 V, 40 °C 200-480 V AC, 110-230 V AC/DC Screw terminals

General technical data		
product brand name		SIRIUS
product feature		
 integrated bypass contact system 		Yes
• thyristors		Yes
product function		
 intrinsic device protection 		No
 motor overload protection 		No
 evaluation of thermistor motor protection 		No
external reset		No
adjustable current limitation		No
• inside-delta circuit		No
product component motor brake output		No
insulation voltage rated value	V	600
degree of pollution		3, acc. to IEC 60947-4-2
reference code according to EN 61346-2		Q
reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750		G
Power Electronics		
product designation		Soft starter
operational current		
 at 40 °C rated value 	Α	80
 at 50 °C rated value 	Α	73
 at 60 °C rated value 	Α	66
yielded mechanical performance for 3-phase motors • at 230 V		
— at standard circuit at 40 °C rated value	kW	22
at 400 V	IV V V	22
— at standard circuit at 40 °C rated value	kW	45
yielded mechanical performance [hp] for 3-phase AC motor at 200/208 V at standard circuit at 50 °C rated value	hp	20
operating frequency rated value	Hz	50 60
relative negative tolerance of the operating frequency	%	-10
relative positive tolerance of the operating frequency	%	10
operating voltage at standard circuit rated value	V	200 480
relative negative tolerance of the operating voltage at standard circuit	%	-15
relative positive tolerance of the operating voltage at standard circuit	%	10
minimum load [%]	%	10
continuous operating current [% of le] at 40 °C	%	115

Soperation typical Control circuit/ Control Uppe of voltage of the control supply voltage Control supply voltage frequency 2 rated value Control supply voltage frequency 3 control supply voltage Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at DC V 110 230 Control supply voltage 1 at			
Speed of vottage of the control supply vottage control supply voltage frequency 1 rated value control supply voltage frequency 2 rated value control supply voltage at AC at 80 tsz voltage frequency 2 rated value control supply voltage 1 at AC at 80 tsz voltage frequency 2 rated value control supply voltage 1 at AC at 80 tsz voltage frequency 2 rated value relative negative tolerance of the control supply voltage at AC at 80 tsz voltage positive tolerance of the control supply voltage at AC at 80 tsz voltage positive tolerance of the control supply voltage at AC at 80 tsz voltage positive tolerance of the control supply voltage at AC at 80 tsz voltage positive tolerance of the control supply voltage at AC at 80 tsz voltage positive tolerance of the control supply voltage at AC at 80 tsz voltage positive tolerance of the control supply voltage at AC at 80 tsz voltage positive tolerance of the control supply voltage at AC at 80 tsz voltage positive tolerance of the control supply voltage at CC at 80 tsz voltage positive tolerance of the control supply voltage at CC at 80 tsz voltage positive tolerance of the control supply voltage at CC at 80 tsz voltage positive tolerance of the control supply voltage at CC at 80 tsz voltage positive tolerance of the control supply voltage at CC at 80 tsz voltage positive tolerance of the control supply voltage at CC at 80 tsz voltage positive tolerance of the control supply voltage at CC at 80 tsz voltage positive tolerance of the control supply voltage at CC at 80 tsz voltage positive tolerance of the control supply voltage at CC at 80 tsz voltage positive tolerance of the control supply voltage at CC at 80 tsz voltage positive tolerance of the control supply voltage at CC at 80 tsz voltage positive t		W	12
Spee of wileage of the control supply voltage control supply voltage frequency? Trated value control supply voltage frequency? Trated value treative negative tolerance of the control supply voltage frequency control supply voltage at at AC at 80 Mz control supply voltage at at AC at 80 Mz control supply voltage at at AC at 80 Mz control supply voltage at at AC at 80 Mz control supply voltage at at AC at 80 Mz control supply voltage at at AC at 80 Mz control supply voltage at at AC at 80 Mz control supply voltage at at AC at 80 Mz control supply voltage at AC at 80 Mz control supply v			
control supply voltage frequency 1 rated value relative negative tolerance of the control supply voltage control supply voltage 1 at AC at 50 Hz voltage 1 at DC relative negative tolerance of the control supply voltage at AC at 50 Hz voltage 1 at DC voltage 1 at DC voltage 1 at AC at 50 Hz voltage 1 at DC voltage 1 at DC voltage 1 at DC voltage 1 at AC at 50 Hz voltage 1 at DC voltage 1 at			ACIDO
Leather nagative tolerance of the control supply voltage frequency. Leather nagative tolerance of the control supply voltage frequency. Leather pacifies tolerance of the control supply voltage at AL AC at 50 Hz Leather pacifies tolerance of the control supply voltage at AC at 50 Hz Leather pacifies tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather nagative tolerance of the control supply voltage at AC at 50 Hz Leather		He	
relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage fractor at 80 Hz vol			
frequency ' relative polarize of the control supply voltage frequency ' 110230 control supply voltage 1 at AC at 50 Hz			
frequency control supply voltage 1 at AC at 50 Hz control supply voltage 1 at AC at 50 Hz control supply voltage 1 at AC at 50 Hz voltage 1 at AC	frequency		
control supply voltage 1 at AC at 60 Hz relative negative tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 60 Hz relative positive tolerance of the control supply voltage at 2 dt 70 Hz relative positive tolerance of the control supply voltage at 2 dt 70 Hz relative positive tolerance of the control supply voltage at 2 dt 70 Hz relative positive tolerance of the control supply positive tolerance of the control supply positive tolerance of the control supply voltage at 2 dt 70 Hz relative positive tolerance of the control supply positive tolerance of the control supply positive tolerance of the control		%	10
Section of the control supply voltage at Act at 50 Hz.	control supply voltage 1 at AC at 50 Hz	V	110 230
AC at 50 HZ relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz Control supply voltage 1 at DC relative negative tolerance of the control supply voltage at BC relative negative tolerance of the control supply voltage at BC relative negative tolerance of the control supply voltage at BC relative negative tolerance of the control supply voltage at BC relative negative tolerance of the control supply voltage at BC relative negative tolerance of the control supply voltage at BC relative negative tolerance of the control supply voltage at BC relative negative tolerance of the control supply voltage at BC relative negative tolerance of the control supply voltage at BC relative negative tolerance of the control supply voltage at BC relative negative tolerance of the control supply voltage at BC relative negative tolerance of the control supply voltage at BC relative negative tolerance of the control supply voltage at BC relative negative tolerance of the control supply voltage at BC relative negative tolerance of the control supply voltage at BC relative negative tolerance of the control supply voltage at BC relative negative tolerance of the control supply voltage at BC relative negative tolerance of the control supply voltage at BC size of engine control device Size of engine control device Number of Size of engine control device ***Ownwards** ***In TO ***Ownwards** ***In TO ***Ownwards** ***In TO ***Ownwards** ***In Size of engine negative tolerance of the tolerance of the control device of the negative tolerance of the negat	control supply voltage 1 at AC at 60 Hz	V	110 230
AC at 50 ftz Trailative negative tolerance of the control supply voltage at AC at 60 ftz Trailative negative tolerance of the control supply voltage at AC at 60 ftz Trailative negative tolerance of the control supply voltage at BC Trailative positive tolerance of the control supply voltage at BC Trailative positive tolerance of the control supply voltage at BC Trailative positive tolerance of the control supply voltage at BC Trailative positive tolerance of the control supply voltage at BC Trailative positive tolerance of the control supply voltage at BC Trailative positive tolerance of the control supply voltage at BC Trailative positive tolerance of the control supply voltage at BC Trailative positive tolerance of the control supply voltage at BC Trailative positive tolerance of the control supply voltage at BC Trailative positive tolerance of the control supply voltage at BC Trailative positive tolerance of the control supply voltage at BC Trailative positive tolerance of the control supply voltage at BC Trailative positive tolerance of the control supply voltage at BC Trailative positive tolerance of the control supply voltage at BC Trailative positive tolerance of the control supply voltage at BC Trailative positive tolerance of the control supply voltage at BC Trailative positive tolerance of the control supply voltage at BC Trailative positive tolerance of the control supply voltage at BC Trailative positive tolerance of the Control supply voltage at BC Trailative positive tolerance of the Control supply voltage at BC Trailative positive tolerance of the Control supply voltage at BC Trailative positive tolerance of the Control supply voltage at BC Trailative positive tolerance of the Control supply voltage at BC Trailative positive tolerance of the Control supply voltage at BC Trailative positive tolerance of the Control supply voltage at BC Trailative positive tolerance of the Control supply voltage at BC Trailative positive tolerance of the Control supply voltage at BC Tr		%	-15
AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage 1 at DC rolative nogative tolerance of the control supply voltage at DC rolative nogative tolerance of the control supply voltage at DC rolative nogative tolerance of the control supply voltage at DC rolative nogative tolerance of the control supply voltage at DC display version for fault signal Mochanical data size of engine control device width mm 70 height mm 170 depth mm 170 fastening method mm 150 fastening method mm 150 fastening method mounting position mm 150 fastening method mounting position mm 150 **a the side mounting surface **-10" rotatable, with vertical rotatable, with vertical mounting surface **-10" rotatable, with vertical rotatable, with vertical rotatable, and current circuit **C		%	10
AC at 60 Hz control supply voltage 1 at DC relative negative tolerance of the control supply voltage at DC relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC display version for fault signal red Mechanical data size of engine control device width mm 70 height mm 170 fastening method mm 190 fastening method mounting position mounting position mounting position with vertical mounting surface +/-10" rotatable, with vertical mounting surface +/-10" filiable to the front and back required spacing with side-by-side mounting * upwards * at the side * downwards wire length maximum m 30 number of poles for main current circuit * Connactions / Forminals type of electrical connection * for availating and control circuit * of availating and control circuit * of availating and control circuit * screw-type terminals number of NC contacts for auxiliary contacts number of NC contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point * solid * finely stranded with core end processing * stranded * stranded * linely stranded with core end processing * stranded * sind ended * finely stranded with core end processing * stranded * sind ended * stranded * strand		%	-15
rolative negative tolerance of the control supply voltage at DC rolative positive tolerance of the control supply voltage at DC display version for fault signal Mechanical data size of engine control device width mm 70 height mm 170 depth mm 190 fastening method screw and snap-on mounting surface +/-10" rolatable, with vertical mounting position mounting position with side-by-side mounting • upwards mm 60 • at the side mm 30 • otherwise side of engine control device mm 40 wire length maximum mm 40 wire length maximum mm 40 wire length maximum mm 40 • for main current circuit sonaber of NC contacts for auxiliary contacts number of NC contacts for auxiliary contacts • number of NC contacts for auxiliary contacts • solid • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded		%	10
relative positive tolerance of the control supply voltage at DC display version for fault signal Mechanical data size of engine control device width	control supply voltage 1 at DC	V	110 230
display version for fault signal Mechanical data Size of engine control device width mm 70 height mm 170 depth mm 190 fastening method mounting position required spacing with side-by-side mounting • upwards • at the side mm 30 • at the side mm 30 • at the side mm 30 wire length maximum m 40 wire length maximum m 300 number of poles for main current circuit **Connections/* Terminals** **type of electrical connection • for main current circuit **of availating and control circuit **number of NC contacts for auxiliary contacts 1 number of NC contacts for auxiliary contacts 1 type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded • finely stranded with core end processing • str		%	-15
size of engine control device width height height mm 70 fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards mm 40 wire length maximum number of poles for main current circuit • for main current circuit • for main current circuit • for main current circuit • for main current circuit • for main current circuit • for main current circuit • sore-type deminal using the front clamping point • solid • finely stranded with core end processing • stranded • finely strand		%	10
size of engine control device width height height mm 70 fastening method mounting position required spacing with side-by-side mounting • upwards • at the side • downwards mm 40 wire length maximum number of poles for main current circuit • for main current circuit • for main current circuit • for main current circuit • for main current circuit • for main current circuit • for main current circuit • sore-type deminal using the front clamping point • solid • finely stranded with core end processing • stranded • finely strand	display version for fault signal		red
width height mm 170 height mm 170 fastening method screw and snap-on mounting mounting position required spacing with side-by-side mounting	Mechanical data		
width height mm 70 height mm 170 depth mm 190 fastening method screw and snap-on mounting surface +/-10" rotatable, with vertical mounting surface +/-10" tiltable to the front and back required spacing with side-by-side mounting • upwards mm 60 • at the side mm 30 • at the side mm 30 • downwards mm 40 wire length maximum m 3000 number of poles for main current circuit 3 • for auxiliary contects • for main current circuit screw-type terminals • for auxiliary and control circuit screw-type terminals • for auxiliary contacts for auxiliary contacts • for auxiliary contacts for auxiliary contacts • for host contacts for auxiliary contacts • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded	size of engine control device		S3
depth mm 190 fastening method screw and snap-on mounting mounting position With vertical mounting surface +/-10" rotatable, with vertical mounting surface +/-10" rotatable, with vertical mounting surface +/-10" rotatable, with vertical mounting surface +/-10" tiltable to the front and back required spacing with side-by-side mounting • upwards • upwards • at the side • downwards mm 60 • downwards mm 40 wire length maximum number of poles for main current circuit • for one contacts for auxiliary contacts number of NC contacts for auxiliary contacts number of NC contacts for auxiliary contacts number of CO contacts for auxiliary contacts 1 1 1 2x (2.5 16 mm²) • solid • finely stranded with core end processing • stranded • solid • finely stranded with core end processing • stranded		mm	
depth mm 190 fastening method screw and snap-on mounting mounting position With vertical mounting surface +/-10" rotatable, with vertical mounting surface +/-10" tiltable to the front and back required spacing with side-by-side mounting			
fastening method mounting position With vertical mounting surface */-10" rotatable, with vertical mounting surface */-10" rotatable to feed and surface */-10" rotatable for a screw-type terminals */		mm	190
mounting position With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/-10° tiltable to the front and back ### ### ### ### ### ### ### ### ### #	·		
required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum m 300 number of poles for main current circuit **Connections/ Terminals **Uppe of electrical connection • for main current circuit • for auxiliary and control circuit • for auxiliary contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts 1 number of CO contacts for auxiliary contacts 1 ype of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • finely stranded with core end processing • stranded 1 ye of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded 1 ype of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded 10 70 mm² 2x (2.5 16 mm²) • stranded 10 70 mm² 2x (2.5 16 mm²) • stranded 10 70 mm² 2x (2.5 35 mm²) • stranded			With vertical mounting surface +/-10° rotatable, with vertical
upwards at the side downwards mm	required spacing with side-by-side mounting		
at the side downwards mm do do do mm do do do mm do		mm	60
wire length maximum m 300 number of poles for main current circuit 3 Connections/ Terminals type of electrical connection • for main current circuit screw-type terminals • for auxiliary and control circuit screw-type terminals • for auxiliary and control circuit screw-type terminals • mumber of NC contacts for auxiliary contacts number of NC contacts for auxiliary contacts 1 number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • solid • finely stranded with core end processing • stranded • solid • finely stranded with core end processing • stranded • solid • finely stranded with core end processing • stranded • solid • finely stranded with core end processing • stranded • solid • finely stranded with core end processing • stranded • solid • finely stranded with core end processing • stranded • solid • finely stranded with core end processing • stranded • stranded type of connectable conductor cross-sections for AWG cables for main contacts for box terminal	• at the side	mm	30
wire length maximum m 300 number of poles for main current circuit 3 Connections/ Terminals type of electrical connection for main current circuit for maxiliary and control circuit for auxiliary and control circuit screw-type terminals number of NC contacts for auxiliary contacts 0 number of CO contacts for auxiliary contacts 1 type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point 0 solid 2x (2.5 16 mm²) stranded 2.5 35 mm² type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point 2x (2.5 16 mm²) solid 2x (2.5 16 mm²) finely stranded with core end processing 2.5 50 mm² stranded 2x (2.5 16 mm²) type of connectable conductor cross-sections for main contacts for box terminal using both clamping points 2x (2.5 16 mm²) e solid 2x (2.5 16 mm²) finely stranded with core end processing 2x (2.5 35 mm²) e stranded 2x (2.5 35 mm²) type of connectable conductor cross-sections for AWG cables for main contacts for box terminal			
number of poles for main current circuit Connections/ Terminals type of electrical connection of or main current circuit of or auxiliary and control circuit number of NC contacts for auxiliary contacts number of NC contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts 1 number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point osolid finely stranded with core end processing stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point osolid finely stranded with core end processing of inely stranded with core end processing stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points osolid finely stranded with core end processing of connectable conductor cross-sections for main contacts for box terminal using both clamping points osolid finely stranded with core end processing of connectable conductor cross-sections for main contacts for box terminal using both clamping points osolid finely stranded with core end processing of inely stranded with core end processing of stranded type of connectable conductor cross-sections for AWG cables for main contacts for box terminal	wire length maximum		
type of electrical connection • for main current circuit • for auxiliary and control circuit number of NC contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • solid • finely stranded with core end processing • solid • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • solid • finely stranded with core end processing • stranded • solid • so			
type of electrical connection • for main current circuit • for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NC contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • solid • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • solid • finely stranded with core end processing • stranded • solid • solid • finely stranded with core end processing • stranded • solid • solid • stranded • stranded • stranded • stranded • solid • solid • stranded • stranded • solid • stranded • stranded • solid • solid • stranded • stranded • stranded • solid • solid • solid • solid • stranded • stranded	Connections/ Terminals		
• for main current circuit • for auxiliary and control circuit screw-type terminals number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • solid • finely stranded with core end processing • stranded • solid • solid • solid • solid • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • solid • solid • solid • solid • solid • finely stranded with core end processing • stranded • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • stranded • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • solid • solid • finely stranded with core end processing • stranded • stranded • type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • solid • finely stranded with core end processing • stranded • type of connectable conductor cross-sections for AWG cables for main contacts for box terminal			
• for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts 1 number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • solid • solid • solid • solid • siranded • stranded • solid • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • solid • solid • solid • finely stranded with core end processing • stranded • solid • finely stranded with core end processing • stranded • solid • finely stranded with core end processing • stranded • strande			screw-type terminals
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • stranded • solid • sol	for auxiliary and control circuit		· · · · · · · · · · · · · · · · · · ·
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • solid • solid • solid • solid • stranded • solid • solid	<u> </u>		
number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • solid • stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • solid • solid • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid •			
type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • solid • finely stranded with core end processing • stranded • stranded • solid • sinely stranded with core end processing • stranded with core end processing • stranded • stranded • stranded • stranded • solid			0
solid inely stranded with core end processing stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point solid stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point solid stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points solid	type of connectable conductor cross-sections for main		
 finely stranded with core end processing ∫ stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point ∫ solid ∫ stranded with core end processing ∫ stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points ∫ solid ∫ solid ∫ stranded ∫ x (2.5 16 mm²) √ x (2.5 16 mm²) √ x (2.5 16 mm²) ✓ x (2.5 35 mm²) ✓ x (2x (2.5 16 mm²)
stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point solid solid solid	finely stranded with core end processing		
contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded 2x (2.5 16 mm²) 2x (2.5 16 mm²) 2x (2.5 35 mm²) 2x (2.5 35 mm²) 2x (10 50 mm²) type of connectable conductor cross-sections for AWG cables for main contacts for box terminal	• stranded		
 finely stranded with core end processing stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points solid finely stranded with core end processing stranded type of connectable conductor cross-sections for AWG cables for main contacts for box terminal 	contacts for box terminal using the back clamping point		2v (2 5 16 mm²)
stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points solid solid finely stranded with core end processing stranded stranded type of connectable conductor cross-sections for AWG cables for main contacts for box terminal			
contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded 2x (2.5 16 mm²) 2x (2.5 35 mm²) 2x (10 50 mm²) type of connectable conductor cross-sections for AWG cables for main contacts for box terminal			
 finely stranded with core end processing stranded 2x (2.5 35 mm²) type of connectable conductor cross-sections for AWG cables for main contacts for box terminal 	••		
• stranded	• solid		2x (2.5 16 mm²)
type of connectable conductor cross-sections for AWG cables for main contacts for box terminal			
• using the back clamping point 10 2/0	type of connectable conductor cross-sections for AWG		
	using the back clamping point		10 2/0

 using the front clamping point 		10 2/0
 using both clamping points 		2x (10 1/0)
type of connectable conductor cross-sections for DIN cable lug for main contacts		
 finely stranded 		2 x (10 50 mm²)
• stranded		2x (10 70 mm²)
type of connectable conductor cross-sections for auxiliary contacts		
• solid		2x (0.5 2.5 mm²)
 finely stranded with core end processing 		2x (0.5 1.5 mm²)
type of connectable conductor cross-sections for AWG cables		
• for main contacts		2x (7 1/0)
 for auxiliary contacts 		2x (20 14)
Ambient conditions		
installation altitude at height above sea level	m	5 000
environmental category		
 during transport according to IEC 60721 		2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
 during storage according to IEC 60721 		1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
during operation according to IEC 60721		3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
ambient temperature		
 during operation 	°C	-25 +60
during storage	°C	-40 +80
derating temperature	°C	40
protection class IP on the front according to IEC 60529		IP20
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front
Certificates/ approvals		

Confirmation









EMC

Declaration of Conformity

General Product Approval

Test Certificates

other





Type Test Certificates/Test Report

Special Test Certificate

Confirmation

Miscellaneous

Railway

Vibration and Shock

UL/CSA ratings		
yielded mechanical performance [hp] for 3-phase AC motor		
• at 220/230 V		
 at standard circuit at 50 °C rated value 	hp	25
• at 460/480 V		
 at standard circuit at 50 °C rated value 	hp	50
contact rating of auxiliary contacts according to UL		B300 / R300
Further information		

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW3046-1BB14


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW3046-1BB14


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RW3046-1BB14

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW3046-1BB14&lang=en

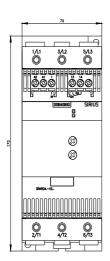

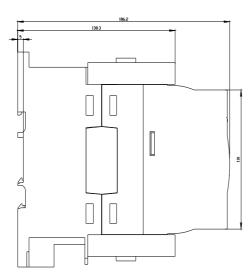

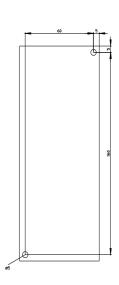

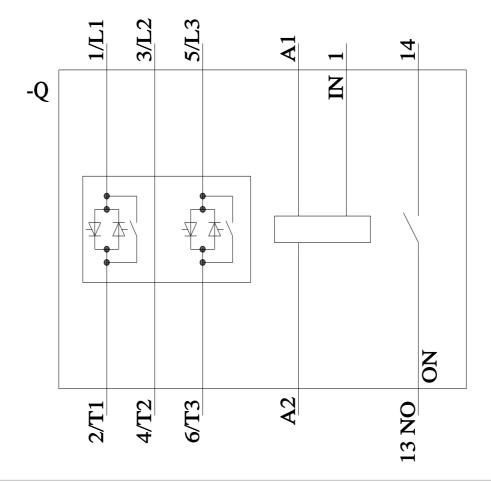

last modified: 8/24/2023 🖸