




Capacity from 25 kg to 2500 kg

- AISI 4340 NICKEL PLATED STEEL
- COMBINED ERROR $\leq \pm 0.02\%$ (0.017% C4)
- IP67 PROTECTION RATING

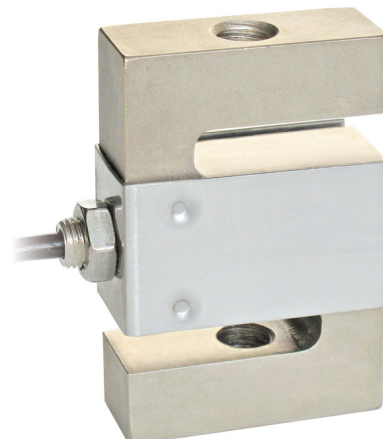

CAPACITY	kg	ACCURACY CLASS				NET WEIGHT (kg)
		C3	C4			
25		—	—	—	—	0.4
100		•	•	•	•	0.6
200		•	•	—	•	0.6
300		•	•	—	•	0.6
500		•	•	•	•	0.7
1000		•	•	•	•	0.9
2500		•	•	•	•	1.6

ON REQUEST

CERTIFICATIONS



OIML R60 C3



Complies with the Eurasian Customs Union regulations



Equivalent of the CE marking for the United Kingdom



Complies with United Kingdom regulations for legal for trade use

CERTIFICATIONS ON REQUEST

Calibration report

LAT Accredia calibration certificate ISO 376 or ASTM E74 for capacities from 1000 kg to 10000 kg



ATEX II 1G 2D (zone 0-1-2-21-22) (CE - UKCA)



IECEx (zone 0-1-2-20-21-22)



OIML R60 C4



Complies with the Eurasian Customs Union regulations for use in potentially explosive atmospheres



FM HazLoc - Complies with the United States and Canada regulations for use in potentially explosive atmospheres



Complies with Chinese market regulations for use in potentially explosive atmospheres



NTEP - Complies with United States regulations for legal for trade use




TENSION (COMPRESSION) LOAD CELLS

COMPLEMENTARY ACCESSORIES




DESCRIPTION	DIMENSIONS	LOAD CELL CAPACITY	CODE
Ball-and-socket joint with nut:			
stainless steel	M12x1.75	200-1000 kg	EM-INOX
	M20x1.5	2500 kg	
galvanized C40 steel	M8x1.25	25 kg	EM
	M10x1.5	100 kg	
	M12x1.75	200-1000 kg	
	M20x1.5	2500 kg	

DIMENSIONS (mm)

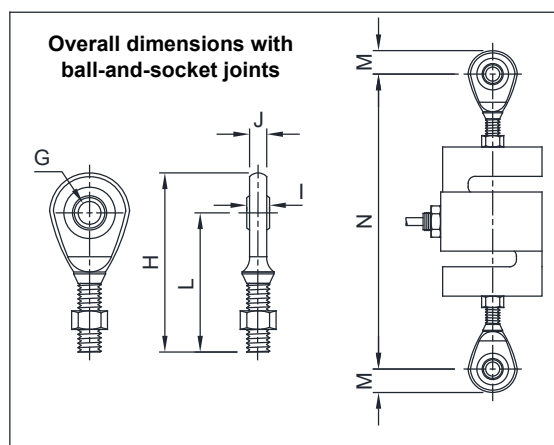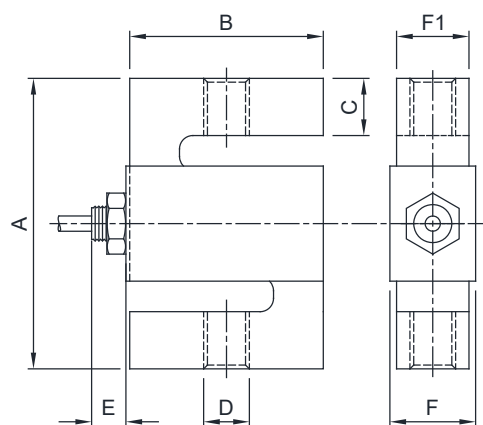

Example of application
on the tension bar
mechanical scale




	A	B	C	D	E	F	F1	G	H	I	J	L	M	N (≈)
25 kg	76.2	50.8	15.7	M8x1.25	10	14.5	12.7	Ø8	54	8	6.5	42.5	11.5	129
100 kg	76.2	50.8	15.3	M10x1.5	9	22.4	19	Ø10	62.5	9	7.5	48.5	14	142
200 kg					8									
300 kg	76.2	50.8	14.4	M12x1.75	9	22.4	19	Ø12	71	10	8.5	54.5	16.5	154
500 kg					9									
1000 kg	76.2	50.8	12.5	M12x1.75	10	28.9	25.4	Ø12	71	10	8.5	54.5	16.5	159
2500 kg	101.6	76.2	20	M20x1.5	6	28.9	25.4	Ø20	104.5	16	13.5	77.5	27	217

TECHNICAL FEATURES

Material	AISI 4340 nickel plated steel		
OIML R60 Accuracy class • Verification intervals	-	C3 • 3000	C4 • 4000
Nominal load (E max)	25 kg	100 - 200 - 300 kg 500 - 1000 - 2500 kg	100 - 200 - 300 kg 500 - 1000 - 2500 kg
Minimum verification interval (V min)	-	E max / 10000 E max / 15000	E max / 20000
Combined error	$\leq \pm 0.02\%$	$\leq \pm 0.02\%$	$\leq \pm 0.017\%$
Protection rating	IP67		
Rated output	2 mV/V $\pm 0.2\%$	Input resistance	350 Ω ± 3.5
Temperature effect on zero	0.0015% $^{\circ}\text{C}$	Output resistance	350 Ω ± 3.5
Temperature effect on span	0.0017% $^{\circ}\text{C}$	Zero balance	$\pm 1\%$
Compensated temperature range	-10 $^{\circ}\text{C}$ / +40 $^{\circ}\text{C}$	Insulation resistance	>5000 M Ω
Operating temperature range	-35 $^{\circ}\text{C}$ / +65 $^{\circ}\text{C}$	Safe overload (% of full scale)	150%
Creep at nominal load in 30 minutes	0.03%	Ultimate overload (% of full scale)	300%
Max supply voltage without damage	18 V	Deflection at nominal load	0.4 mm

ELECTRICAL CONNECTIONS

Cable length	5 m (25 - 300 kg); 10 m (500 - 2500 kg)
Cable diameter	5 mm
Cores	4 x 0.24 mm ²



SHIELD

+ SIGNAL GREEN

+ EXCITATION RED

- SIGNAL WHITE

- EXCITATION BLACK

The Company reserves the right to make changes to the technical data, drawings and images without notice.