



Limit switches

XC Standard range, industrial format EN 50041
Metal, conforming to CENELEC EN 50041, XCKJ
Fixed or plug-in body
Variable composition: standard bodies

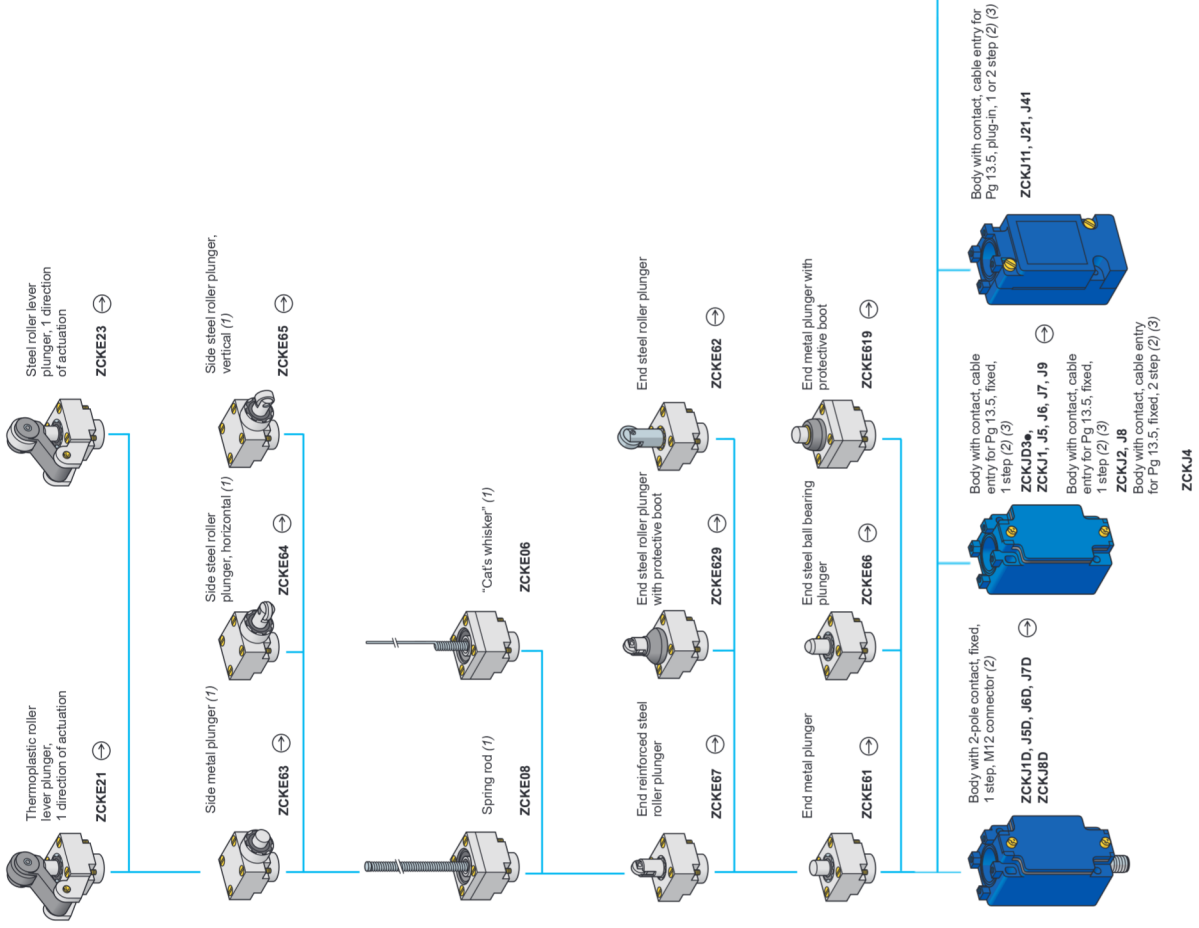

(1) Cannot be used with bodies ZCKJ4 and ZCKJ41.
(2) For further information, see page 159.
(3) For a cable entry/tapped ISO M20 x 1.5, add H29 to the reference. Example: ZCKJ1 becomes ZCKJ1H29.
For a cable entry/tapped 1/2" NPT, add H7 to the reference. Example: ZCKJ1 becomes ZCKJ1H7.

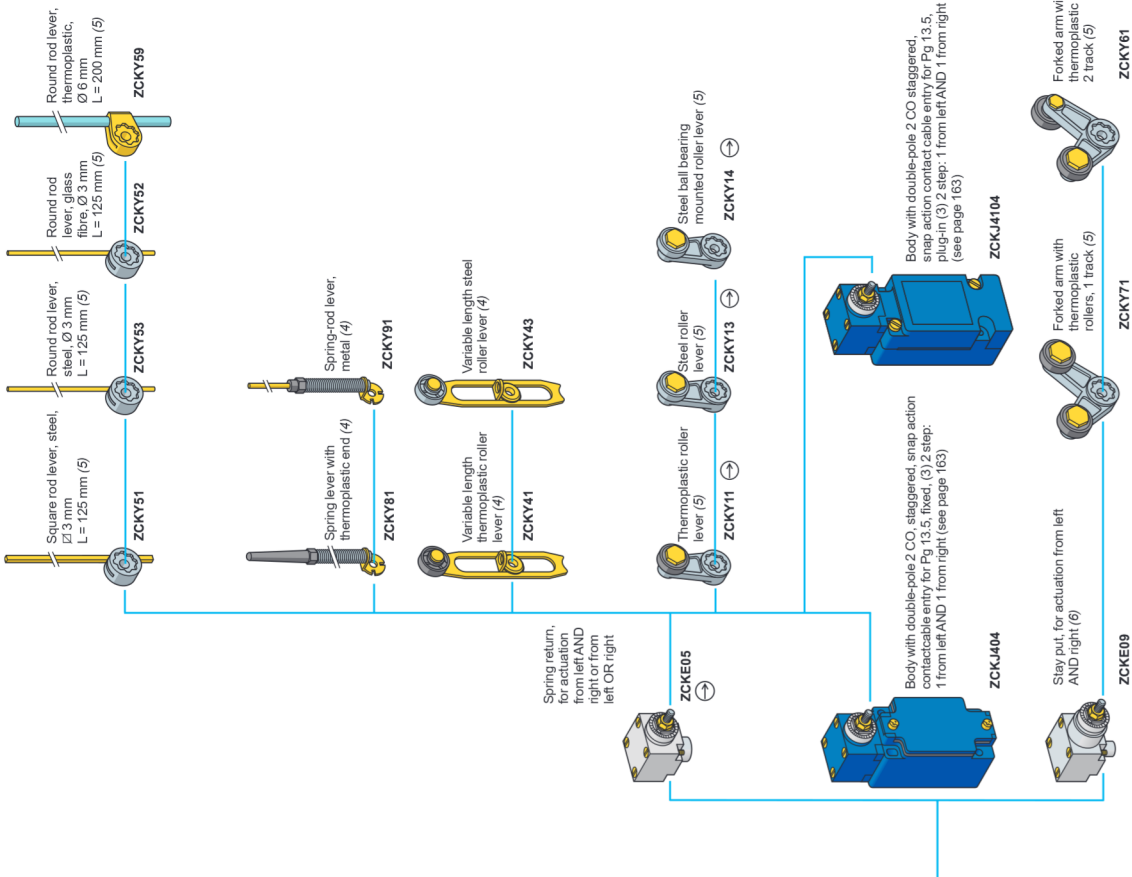

⊕ : head assuring positive operating operation.
(4) Adjustable throughout 360° in 5° steps, or in 90° steps by reversing the notched washer.
(5) Adjustable throughout 360° in 5° steps, or in 45° steps by reversing the lever mounting.
(6) Suitable for bodies with contacts ZCKJ1 • J2 • J31, J39.