



AR03

Simultaneous Alternating Relay - 3 outputs

Electronic relay designed to alternate 3 different outputs (pumps, compressors...) controlled by an external signal.


Alternates cyclically between 3 outputs.

Possible operation of all 3 outputs at the same time (simultaneous).

Characteristics

- Real changeover relay to alternate cyclically and to avoid short-cycling
- When the device is receiving no external signal, all changeover contacts will remain open
- Mounting on symmetrical DIN rail
- Output changeover relay 8 A / 250V AC $\cos \varphi = 1$
- Output contacts (1 to 6) voltage free
- Operating temperature: -10° to $+60^{\circ}\text{C}$

Dimensions

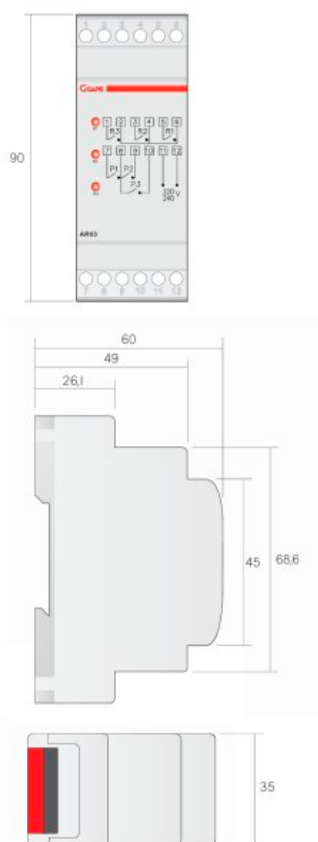


References

References	Width (modules)	Voltage supply
AR03	35mm (2)	220-240V / 380-415 V AC
AR03-24AC	35mm (2)	24 V AC

Diagram



Connection



Signalling

R	Status
●	relay on
☀	stand-by mode (no signal)
⊗	relay off

● ON ☀ OFF ⊗ BLINK